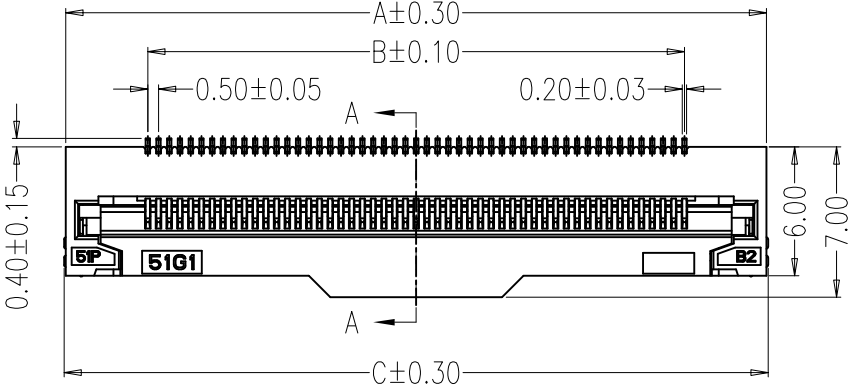


Notes:



1. Material

Hosing:thermoplastic (UL94V-0) nature;
Actuator:thermoplastic (UL94V-0) black;
Terminal:Phosphor bronze;
Fitting nail:Phosphor bronze;

2. Plating

Terminal:Matte Tin 80u"Min. for soldering area;
Gold plated 1u"Min. for contact area;
Fitting nail:Matte Tin 80u" Min. plated.

SECTION A-A
SCALE 2:1

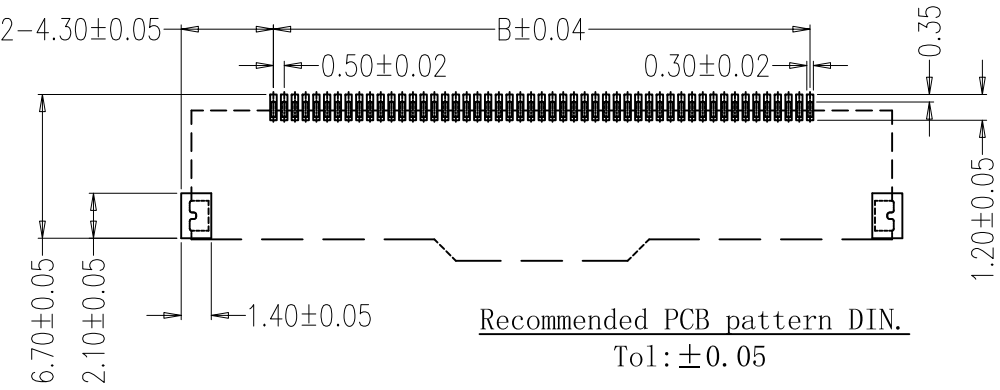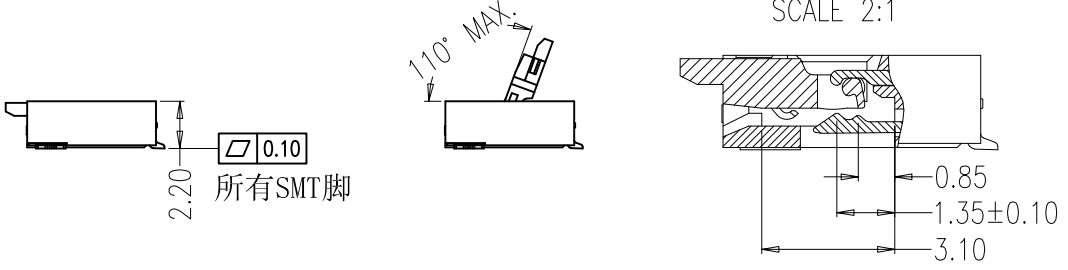

Pin	DIM:A	DIM:B	DIM:C	DIM:D
30	22.14	14.50	22.30	19.10
41	27.64	20.00	27.80	24.60
51	32.64	25.00	32.80	29.60

	A	New drawing	修改日期2024.5.6
Coordinate 坐标位置	REV. 版本	MODIFICATION. 变更内容	DRAWN/DATE 设计/日期

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN. 设计 徐文兵	深圳市金科基电子有限公司 Jkj Electronic Co.,Ltd	
		CHECKED. 审核		
X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05	X° ±2.0° .X° ±1.0° .XX° ±0.5°		FILE NAME. 品名	2.2H 0.5Pitch FPC CONN SMT 前掀式 (窄版)
			PART NUMBER. 料号	101103-***411-1
UNIT:mm A4	SCALE 1:1 SHEET:1 of 2	APPROVED. 核准	Drawing No. 图号	REV. A